



NITECH IPM®
NITECH INTERNATIONAL PACKAGING MACHINES

77203-LPAW-60 Manual Quick-Load Film Delivery with Adjustable Tension and Pendant-Controlled Carriage Movement

Overview

The NITECH 77203-LPAW-60 is designed for operations that need hands-on wrapping with the added benefit of low-profile loading. Using a Quick-Load film dispenser and pendant control, it allows the operator to manage the wrap process while loading pallets with a pallet jack.


Load the turntable, attach the film to the pallet, and begin wrapping. As the load rotates, the operator controls both the turntable and the up and down movement of the film carriage using the pendant, adjusting film tension and coverage as needed.

This combination of direct control and easy loading makes it a practical solution for low-volume applications, light loads, or loads that require individual attention during the wrap process.

Operators now remain stationary while the load rotates, simplifying the wrapping process while reducing worker fatigue and improving overall efficiency.

Features

- ✓ Low-profile turntable for pallet jack loading
- ✓ Manual Quick-Load film delivery system
- ✓ Accepts 12"-18" hand film & 20" machine film
- ✓ Pendant-controlled film carriage up and down movement
- ✓ Adjustable film tension (load brake control)
- ✓ Turntable on/off control from pendant
- ✓ Durable all steel construction
- ✓ Fork-Lift Portable from front
- ✓ 4,000 lb load capacity
- ✓ Scale and ramp options available

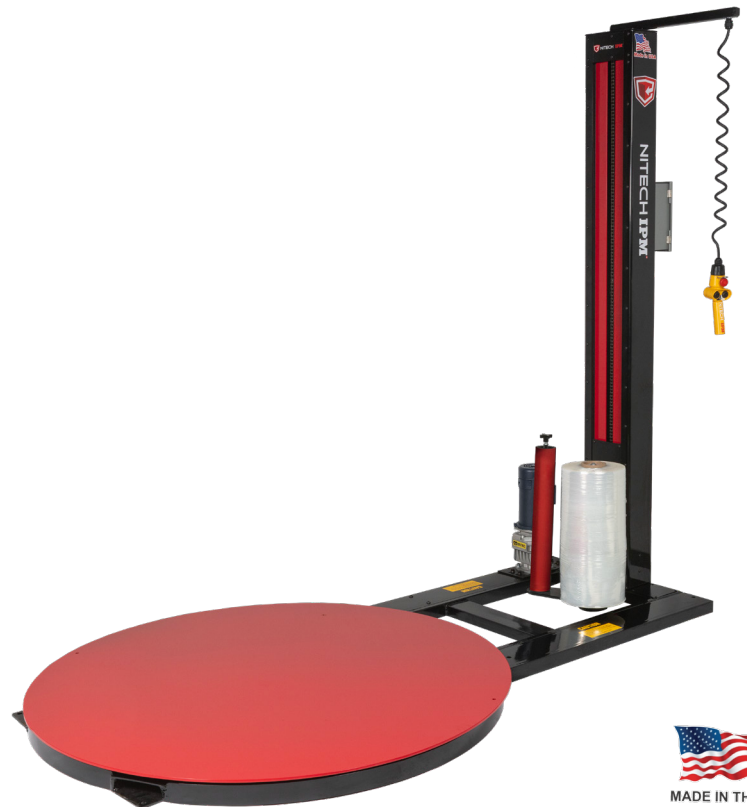

NITECH IPM®
NITECH INTERNATIONAL PACKAGING MACHINES



info@nitechipm.com



800-237-6496



Specifications

Machine Profile	Low Profile
Maximum Load Size	52" x 52" x 80"
Product Capacity	30 Loads Per Hour
Machine Dimensions	108"L x 60"W x 94"H
Weight Capacity	4,000 lbs.
Electrical Data	120 VAC 60 Hertz 20 Amps, Conventional Style 3 Prong 20' Power Cord, UL Approved Components
Turntable Size	60" Round Table w/ 2" Safety skirt
Turntable Height	2 7/8"
Turntable Drive	1/2 hp DC Motor (Totally Enclosed Fan Cooled), 4 Point Cam follower Supports (5,000 lb. capacity each), Heavy-Duty #40 Roller Chain and Drive Sprockets, High Efficient Lubrication Free helical gear box, Synthetic Lube in all Gearboxes (-30 to 120 Degrees), Variable Speed 0-15 RPM with Soft Start and Soft Stop
Controls	Pendant Control with Turntable On / Off Switch, Up/Down Rocker Switch
Film Delivery	Quick-Load Film Delivery, Manually Adjusted Variable Film Stretch (Load Brake), Stretch Level 30% to 150% Force to Load, Accepts 12"-20" Rolls of Stretch Film on 3" Core
Film Carriage	#40 Chain Carriage Lift, 1/3 HP 90 Volt DC Motor, Carriage Kill Switch Top/ Bottom, Variable Speed Carriage 0-20 FPM
Tower Construction	80" Wrap height using 20" Film, Adjustable Lower Limit Switch, Carriage Kill Switch Top and Bottom, Formed All Steel Tower, Maintenance Free UHMW Full Tower Slides, Optional wrap heights available up to 120"
Frame Construction	All Welded Steel Construction, Easy Access to all Components, Forklift Portable from Front, Heavy-Duty Structural Tube and Plate, Industrial Powder Coated Paint Finish
Power Required:	115 volts, 50/60 hertz, 20 Amp Service
Technical Documentation	Complete Electrical Schematics, Complete Operators Manual, Illustrated Parts Break down
Warranty	4 Year Limited Warranty (100% of All Components), 10-Year Structural Warranty 5-Year Turntable Gearbox
Average Cycle Time	1 minute 20 seconds wrapping 40" x 48" x 60" pallet with 12 wraps. Load configuration will vary wrap cycle.
Shipping Weight	1,075 lbs



NITECH IPM
NITECH INTERNATIONAL PACKAGING MACHINES



info@nitechipm.com



800-237-6496

